


23 FEB 2005
PCT/DK03/00633



Europäisches
Patentamt

European
Patent Office

RO/DK 10 OCT 2003
Office européen
des brevets

REC'D 17 OCT 2003	
WIPO	PCT

Bescheinigung Certificate Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079058.0

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts:
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

PCT/DK 03/00633

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079058.0

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr.:
Application no.: 02079058.0
Demande no:

Anmeldetag:
Date of filing: 26.09.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

VKR Holding A/S
Tobaksvejen 10
2860 Soeborg
DANEMARK

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

Method of controlling operation of at least one transmitter and/or one receiver,
communication system and use of such a method or such a system.

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H04L12/56

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

METHOD OF CONTROLLING OPERATION OF AT LEAST ONE TRANSMITTER AND/OR
ONE RECEIVER, COMMUNICATION SYSTEM AND USE OF SUCH A METHOD OR SUCH A
SYSTEM

5 **Field of the invention**

The invention relates to a method of controlling operation of at least one transmitter and/or one receiver in a communication system, e.g. a system for transmission of control signals, request signals, interrogation signals etc.

10

The invention also relates to a communication system comprising at least one transmitter and one receiver, e.g. a system for transmission of control signals, request signals, interrogation signals etc.

15 Further, the invention relates to uses of the method and/or the system according to the invention.

Background of the invention

20 In systems wherein one- or two-way communication is performed between nodes, e.g. units, apparatus, etc. by means of wireless transmission, for example radio frequency transmission, it is of importance that a node, e.g. an apparatus, will be able to receive a transmitted signal, e.g. a message, a dataframe etc. where such a signal has been transmitted from e.g. another node in the system. Normally, this is achieved
25 by letting the node in question be in a receive mode constantly, e.g. by having all necessary circuits and in particular the radio frequency circuits be active continuously. This will of course contribute significantly to the total power consumption of the node in question.

30 Therefore, there is a need to design and/or operate such systems and nodes utilized in such systems in a manner, whereby power consumption is reduced. This need is enhanced owing to the fact that many of the nodes involved in such systems rely on

power supply systems where maximum power, rating and/or capacity are limited, such as battery power supply.

5 Further, the need to be able to establish a communication to or between nodes without time delay or without an unacceptable time delay, e.g. unacceptable in the specific circumstances, must be kept in mind when designing such systems and/or methods for operation.

10 Thus, it is an objective of the invention to provide a method of controlling operation of at least one transmitter and/or one receiver in a communication system as specified above, by means of which communication between a least two nodes, e.g. one and/or two-way communication, in a system may be performed in a manner providing reduction in power consumption.

15 Further, it is an objective of the present invention to provide a communication system comprising at least one transmitter and one receiver, e.g. a system for transmission of control signals, request signals, interrogation signals etc. which allows communication to be performed in a power saving manner.

20 It is also an objective of the invention to provide such a method and such a system for transmission of signals as specified above, by means of which communication may be established reliably and without unacceptable time delay.

25 It is a further objective to provide such a method and a system by means of which it will be possible to lower power consumption remarkably in relation to normal mode operation and in relation to prior art power saving systems.

A further objective of the invention is to present advantageous uses for such a method and/or such a system.

30

These and other objectives are achieved by the invention as explained in the following.

Summary of the invention

In the following a number of operating modes will be referred to when describing
5 and claiming the invention. To clarify these matters, these modes will be briefly
mentioned here.

A transmitter may operate in two modes, namely a normal active mode, e.g.
transmitting or prepared to transmit, and a sleep mode, in which some parts of the
10 transmitter and in particular the radio frequency circuit(s) or part hereof is - more or
less - deactivated.

A receiver may operate in two modes, namely a normal active mode, e.g. receiving
or prepared to receive, and a sleep mode, in which some parts of the receiver and in
15 particular the radio frequency circuit(s) or part hereof is - more or less - deactivated.

A transceiver may similarly operate in two modes, namely a normal active operating
mode, e.g. transmitting/receiving or prepared to transmit or receive, and a sleep
mode, in which some parts of the transceiver and in particular the radio frequency
20 circuit(s) or part hereof is - more or less - deactivated.

Accordingly, a system comprising a least a transmitter and a receiver may be in a
normal operating mode, wherein the least one transmitter and the at least one
receiver are in normal active mode constantly.

25 Further, such a system may be in a power saving mode, wherein the transmitter
and/or the receiver (and/or a transceiver, if comprised in the system) may be in a
sleep mode for a period of time. The invention relates to systems and methods having
such features. A particular embodiment of such a system will be referred to in the
30 following as a long preamble mode system, e.g. operating in accordance with a long
preamble mode, while another particular embodiment will be referred to as time

controlled poll mode system, e.g. operating in accordance with a time controlled poll mode.

5 The invention relates to a method of controlling operation of at least one transmitter and/or one receiver in a communication system, e.g. a system for transmission of control signals, request signals, interrogation signals etc. wherein a signal comprising a message frame transmitted from a transmitter to a receiver comprises a message part indicative of the time of transmission for a later signal.

10 Hereby, it is achieved that one or both of the nodes involved, e.g. a master and a slave node may enter a sleep mode and still be able to engage in scheduled communication again. Thus, predetermined or prescheduled communication may be performed in a reliable manner providing several possibilities of lowering power consumption for one or both of the nodes involved. Obviously, such a method may
15 be performed using two-way communication as well as one-way communication.

Preferably, as specified in claim 2, said message part indicative of the time of transmission for a later signal, e.g. a later dataframe, may relate to the time of transmission for a following signal to be transmitted to said receiver. Hereby, the
20 slave node may be able to enter sleep mode and remain in this mode for the whole period, whereby optimal power reduction may be achieved. However, it will be understood that - if found advantageous - the slave may be active in the time period in question, e.g. between the prescheduled transmissions, for example in accordance with another predetermined receive pattern.

25 Advantageously, as specified in claim 3, said message part indicative of the time of transmission may relate to a period of time following the signal in question. Hereby the slave node as well as the master node may determine the next time of transmission by measuring the lapsed time from the time, the message was received.

30 In a preferred embodiment, as specified in claim 4, said message part indicative of the time of transmission may relate to a point of time relating to a timing reference,

e.g. a timing reference established at each node or at least at one of the nodes involved. Hereby, the next time of transmission may be determined in a simple manner, e.g. by using the commonly available timing means normally comprised in the nodes in question. It may be noted that the timing means may be synchronized
5 regularly, e.g. every time a message is transmitted from a master to a slave, the timing reference of the master may be included in the message and the slave node may adjust its own timing reference, if necessary.

Advantageously, as specified in claim 5, said transmitter may be brought into a
10 special mode, e.g. a sleep mode, a power conserving mode, after having concluded transmission of said signal, preferably after receipt of a confirmation signal from said receiver. Hereby, a significant power saving may be achieved on the part of the transmitter, e.g. the master node. Obviously, a power saving may also be achieved in relation to a long preamble mode, in which the transmitter is programmed to transmit
15 a preamble of a considerable length, e.g. 500 msec, every time a message has to be transmitted. In essence, the power consumption necessary for transmitting such a long preamble may thus be avoided, since according to the invention a preamble of only a relatively small length need to be transmitted.

20 Preferably, as specified in claim 6, said transmitter may be controlled to be brought into normal operating mode at - or before - the time of transmission indicated by said message part. Hereby, the master may be in a sleep mode for essentially the whole period between transmitted messages.

25 In a further preferred embodiment, as specified in claim 7, said receiver may be brought into a special mode, e.g. a sleep mode, a power conserving mode, after having received said signal, preferably after having transmitted a confirmation signal and possibly after a further retransmission time. Hereby, a significant power saving may be achieved on the part of the receiver, e.g. the slave node. Obviously, a power
30 saving may also be achieved in relation to a long preamble mode, in which the receiver is programmed to be active in a receive slot, e.g. for 10 msec, during every period corresponding to a long preamble, e.g. 500 msec. Thus, in the long preamble

mode, the receiver has to be active for at least 10/500 of the time. However, in the time control poll mode, the active time and thus also the power consumption may be reduced by e.g. a factor 1000, all depending on the actual use and transmit/receive pattern in question.

5

Advantageously, as specified in claim 8, said receiver may be controlled to be brought into normal operating mode at - or before - the time of transmission indicated by said message part. Hereby, the slave may be in a sleep mode for essentially the whole period between transmitted messages.

10

In a still further preferred embodiment, as specified in claim 9, said method may comprise steps of resuming synchronization, e.g. in case said receiver has not received said time indicative message part or in case said transmitter has not received confirmation from said receiver of receipt of said time indicative message part.

15

Hereby, a reliable communication method is established.

Advantageously, as specified in claim 10, said steps of resuming synchronization may comprise the step of altering the operating mode of the transmitter until a communication has been established with the receiver, where after normal operating mode may be resumed. Hereby, for example by altering the operation mode of the master node to a long preamble mode, synchronicity may be regained effectively and relatively quickly, thereby minimizing the error time.

Preferably, as specified in claim 11, said steps of resuming synchronization may comprise the step of altering the operating mode of the receiver until a communication has been established with the transmitter, where after normal operating mode may be resumed. Advantageously, the receiver may alter its operation mode to a long preamble mode.

25
30 In an advantageous embodiment, as specified in claim 12, said special mode of said transmitter and/or said receiver may comprise a sleep mode, e.g. a low power consumption mode of a radio frequency operating part, e.g. a radio frequency

transmitter or a receiver, respectively. It will be understood, though, that other parts than the radio frequency parts may be brought into sleep mode, e.g. parts not necessary for the timing and for the reactivation.

- 5 Advantageously, as specified in claim 13, said at least one transmitter and/or at least one receiver may each form part of a node comprising a transceiver arrangement. Although the invention may relate to a system comprising nodes performing by one-way communication, it will be understood that master as well as slave nodes may comprise transceiver arrangements, which also will be apparent from the specific
10 examples given in the detailed description.

- Further, as specified in claim 14, said communication system may comprise at least two nodes, each comprising at least a transmitter and/or a receiver for wireless transmission, e.g. radio frequency transmission. It will be understood that other
15 means of transmission than radio frequency may be utilized. Further, it will be understood that the invention may be utilized in connection with systems comprising a plurality of master and/or slave nodes.

- The invention also relates to a communication system comprising at least one
20 transmitter and one receiver, e.g. a system for transmission of control signals, request signals, interrogation signals etc. wherein said at least one transmitter is designed to be able to include a message part indicative of the time of transmission for a later signal when transmitting a signal to said at least one receiver.

- 25 Hereby, it is achieved that one or both of the nodes involved, e.g. a master and a slave node may enter a sleep mode and still be able to engage in scheduled communication again. Thus, predetermined or prescheduled communication may be performed in a reliable manner providing several possibilities of lowering power consumption for one or both of the nodes involved. Obviously, such a system may
30 operate using two-way communication as well as one-way communication.

When, as specified in claim 16, said at least one transmitter and/or one receiver comprise timing means, the message part indicative of the time of transmission for a later signal may be made readily available to the transmitter and said message part may be readily utilized by the receiver for operative purposes. Hereby, the next time
5 of transmission may be determined in a simple manner, e.g. by using the commonly available timing means normally comprised in the nodes in question. It may be noted that the timing means may be synchronized regularly, e.g. every time a message is transmitted from a master to a slave, the timing reference of the master may be included in the message and the slave node may adjust its own timing reference, if
10 necessary.

In an advantageous embodiment, as specified in claim 17, said at least one receiver may comprise control means for switching between at least two modes of operation in dependence on a received message part indicative of the time of transmission for a
15 later signal. Hereby the altering of the operative modes may be achieved in a relatively simple manner.

In a further advantageous embodiment, as specified in claim 18, said at least one transmitter may comprise control means for switching between at least two modes of
20 operation in dependence on a transmitted message part indicative of the time of transmission for a later signal. Hereby the altering of the operative modes may be achieved in a relatively simple manner.

Preferably, as specified in claim 19, said at least two modes of operation may
25 comprise a normal operating mode and a sleep mode, e.g. a power-conserving mode. It will be understood, though, that other modes maybe involved and that more than two modes may be selectable.

In a still further advantageous embodiment, as specified in claim 20, said sleep
30 mode, e.g. a power conserving mode of said transmitter and/or said receiver may comprise sleep mode, e.g. a low power consumption mode of a radio frequency operating part, e.g. a radio frequency transmitter or a receiver, respectively. It will be

understood, though, that other parts than the radio frequency parts may be brought into sleep mode, e.g. parts not necessary for the timing and for the reactivation.

When, as specified in claim 21, said at least one transmitter and/or said at least one receiver comprises battery power supply means, a particular advantageous embodiment has been achieved, since the resulting low power consumption of the transmitter and/or receiver will provide a prolonged operative life of the power supply, thereby giving enhanced reliability and user-friendliness. Other supply systems may profit as well, though, when the invention is utilized, e.g. solar power operated systems.

In a particular advantageous embodiment, as specified in claim 22, said at least one transmitter and/or said at least one receiver may comprise means, e.g. control means for determining a lack of synchronicity and means for initiating a synchronization resumption process. Hereby the system may quickly take measures to regain synchronicity, whereby a reliable communication may be maintained.

Advantageously, as specified in claim 23, said system may be designed to operate in accordance with a method according to one or more of claims 1 - 14.

Finally, the invention pertains to a use of a method according to one or more of claims 1 - 14 and/or a system according to one or more of claims 15 - 23 for updating of measures values in e.g. control, request and/or interrogation systems.

It will be understood that the invention is of particular importance when dealing with systems where very frequent communication is not necessary and where fast updating of e.g. measured values, control signals, interrogation etc. is not necessary.

The figures

The invention will be explained in further detail below with reference to the figures of which

- fig. 1 shows a general overview of a system according to an embodiment of the invention,
- 5 fig. 2 is a functional diagram illustrating the communication between a master and a slave node as well as the function of these nodes according to an embodiment of the invention,
- fig. 3 shows a functional diagram corresponding to fig. 2, but in a different operational situation,
- fig. 4 shows a functional diagram corresponding to fig. 2, but in a modified embodiment,
- 10 fig. 5 is a functional diagram illustrating a method of regaining synchronicity according to an embodiment of the invention, and
- fig. 6 is a functional diagram corresponding to fig. 5, but illustrating another operational situation.

15

Detailed description

Fig. 1 shows a general overview of a system according to an embodiment of the invention. The system comprises a plurality of nodes or units 2, 4, 6, 8, 10, 12, 14 (N1 – Nn). Some or even all of these may comprise or be linked to devices, for example sensors, drive units for various apparatus and means, etc 20, 22, 24, 26. Such drive units may for example be activators of various types and may be used in a wide variety of applications, as explained in further detail later on.

25 The units N1 – Nn may also or instead comprise or be linked to assorted apparatus, measuring devices, indicating devices, controllers etc. that need to receive information, control signals etc. at certain points of time. A common feature of the units 2, 4, 6, 8, 10, 12 is that it is necessary or advantageous to be able to send some sort of information, signal etc. to the units. Further, it may be necessary or preferable to be able to receive information or signals from the units, e.g. confirmation signals, 30 acknowledgement signals, measurement signals etc.

In the embodiment shown in fig. 1, the nodes or units 4, 6, 12, 14 are equipped with receiving means for radio frequency signals, e.g. including antenna means. Each of these nodes or units may comprise e.g. measuring means, sensors, one or more motor drive units or control units and may be connected to a driven or controlled member etc. It will be understood that these means may be integrated with the unit. It will further be understood that a system may comprise one or more of these nodes or units and that these may be similar or dissimilar and may control one or more similar or different devices. The nodes or units N2, N3, N6 - Nn will also be referred to as controllable units or slave units in the following.

10

The system further comprises one or more nodes or units, e.g. 2, 8, 10 (N1, N4, N5) designed for transmission of signals by means of radio frequency transmission means or other types of wireless transmission. These nodes or units may be used for transmitting control signals or other types of signals to one or more of the other nodes or units in the system.

15

The nodes N1, N4, N5, which may be remote controls, will also be referred to as controllers or master units in the following.

20 The method of performing a communication between the units or nodes comprised in the illustrated system, e.g. between a master node, e.g. the node 2 (N1), and one or more of the other nodes or units N2 - Nn, which may be described as slave units in the following, will now be described in further detail. It will be understood that in this context a master unit will imply a unit or a node in a communication system that initiates a transmission of data, and that a slave unit correspondingly will imply a unit that receives and possibly responds to a transmission from a master unit. Thus, any of the units involved in the system illustrated in fig. 1 may in principle take the role as a master unit as well as a slave unit in accordance with this definition. Further, it should be understood that the slave units will be able to respond to the received signals, e.g. by transmitting a response signal.

30

The transmission of signals, e.g. data between the nodes or units involved will take the form of a transmission of messages comprising a number of frames, packages or the like that are being transmitted between the units, e.g. a first frame from a first unit to a second unit, a second frame from the second unit to the first unit etc. A
5 frame or a package comprises a number of bits that are transmitted consecutively. Each of the frames comprises a preamble part and a payload data part.

The operation of the nodes, e.g. the communication between these nodes and the operative modes of these nodes, e.g. normal active operating mode, sleep mode, and
10 the operative modes of the system, e.g. normal active operating mode, a power saving mode such as time controlled poll mode, long preamble mode etc. will be described in the following with reference to figures 2 - 4.

A node that initiates a transmission will be referred to as a master node or simply a
15 master. A node that responds to received signal from a master, or a node that will only transmit upon request from master, will be referred to as a slave in the following.

In fig. 2 the functionality of a system comprising a master and a slave unit that are
20 operating according to an embodiment of the invention, also referred to as time controlled poll mode, are illustrated. Prior to the time t_1 , both are in a sleep mode, e.g. a mode wherein power consumption has been reduced in relation to the power consumption in a normal, fully operative mode. This may be achieved by deactivating circuits that need not be operable when no transmission needs to be
25 performed or when no reception of signals is expected, such as radio frequency (RF) circuits. However, it will be understood that some parts or circuits, such as some control circuits, need to be operable at all time in order to be able to "wake up" a node. The selection of circuits or circuits parts to be deactivated will of course depend on the specific circumstances and the design of the node, apparatus and/or
30 transmitter/receiver means in question.

- At the time t_1 , which has been indicated or specified by the master node to the slave node previously, the master node and the slave node will switch from sleep mode to a fully operable mode. As indicated, the slave node may initiate its transition from the sleep mode earlier than the master node in order to be able to receive a message transmitted immediately after the time t_1 from the master node. At the time t_1 the master unit transmits a dataframe in a transmit interval TX. This dataframe comprises, apart from a preamble and a message content relating to an ordinary command etc. destined for the slave node a message part indicating a later transmittal or preferably the next time, a signal or a polling will be transmitted to the slave node.
- This message part indicative of the next transmission time for a polling may for example be the absolute time for the transmission, measured in relation to a common time scale, or it may be a value indicating the time that will lapse before transmission is resumed. However, other means of indicating the later time of transmission may be utilized. For example, the later time of transmission may be provided by means of an algorithm known to at least the slave node, but preferably known to both the master node and the slave node. The master node may transmit a message, a sign, a character or the like, on the basis of which the slave node may calculate the later time of transmission, using the algorithm.
- At the time t_1 , the slave node is in a receive mode (RX), however, in the example illustrated in fig. 2, the dataframe transmitted by the master is not received by the slave. The master, which after the transmission has switched to a receive mode (RX) at the time t_2 , will therefore not receive the expected confirmation signal from the slave. After a predetermined time, the master switches to a transmit mode (TX) again at the time t_3 and retransmits the dataframe. At the time t_4 the master switches to a receive mode (RX) and the slave, which this time has received the dataframe, will transmit a confirmation signal. It will be understood that this pattern of repeated transmit- and receive-modes for the master may be repeated a predetermined number of times e.g. two or more than two. For practical reasons, however, the number of repetitions will be limited.

In the example shown in fig. 2, the master has received the confirmation signal from the slave node, and at the time t_5 the master node will switch to sleep mode, e.g. by deactivating the radio-frequency circuit(s) and possibly other circuits and circuit parts. The slave node will however remain in an active mode until the time t_6 , corresponding to the predetermined number of repeated transmissions, since the slave node does not receive a confirmation from the master node. The slave node may therefore in the illustrated example stay active in case the master unit has not received the confirmation signal sent from the slave node at time t_4 , waiting for possible retransmission(s) from the master node. At the time t_6 the slave node is brought into sleep mode, e.g. by deactivating the radio frequency circuit(s) and possibly other circuits and circuit parts.

The master node and the slave node will both be controlled to wake up in accordance with the message part indicative of the next transmittal, and the cycle described above will be repeated.

It will be understood that both master and the slave will have control means to perform the time control and to perform the activation of the deactivated parts. These control means may of course also involve timing means, e.g. clock means etc. whereby the point of time for reactivation may be provided readily if the time for the next transmission has been indicated by a point in time or by a time period. The control means may also be involved if for instance the reactivation time has to be calculated using an algorithm.

The operative cycle illustrated in fig. 3 corresponds to fig. 2, but in fig. 3 a case is shown, where the confirmation signal sent from the slave node at the time t_2 is not received by the master node. The master node will thus in accordance with this embodiment of the invention perform a retransmittal of the signal at the time t_3 . This signal is received by the slave node (again), and at the time t_4 the slave node has switched to transmit mode (TX) and transmits a confirmation signal again. This is received by the master node, which consequently, as explained above, is brought into

sleep mode at the time t_3 . The slave node will as explained above wait until the time t_6 before going into sleep mode.

5 It will be understood that power consumption on the part of the slave node may be reduced further by reducing the time wherein the slave is active waiting for possible retransmissions, e.g. the period from the time t_2 to the time t_6 , or rather the period from a successful receipt of a signal from a master node and a transmittal of a confirmation signal until the time t_6 .

10 In a modified embodiment of the invention, the slave node is controlled to initiate the sleep mode, when a signal from a master node has been received and a confirmation signal has been transmitted. Since the signal from the master node has been successfully received, e.g. the content of the dataframe has been received correctly, by the slave node, it is to be expected that the return confirmation signal will also be
15 received by the master node. Thus, such a modified embodiment will perform with substantially the same or only a slightly lower degree of success than the first embodiment and will have a further enhanced power reduction.

20 Another modified embodiment also having lower power consumption than the embodiment illustrated in fig. 2 and 3, but with a higher degree of efficiency than the above-described modified embodiment is illustrated in fig. 4.

In this embodiment the slave node is controlled in order to wait a number of receive slots, for example one, two etc. after having transmitted a confirmation signal before
25 going into sleep mode.

As exemplified in fig. 4, after master and slave node have been activated at the previously indicated time t_1 , the master node has transmitted a signal, which has been correctly received by the slave node. The slave node has as explained above
30 transmitted a return confirmation signal at the time t_2 . This has however not been received by the master node, and in consequence the master node has switched to transmit mode at the time t_3 and has transmitted a new signal. This retransmitted

signal is -- in the illustrated example -- received by the slave node, which transmits a confirmation signal at the time t_4 . The confirmation signal is received by the master node, which in accordance with the invention is brought into sleep mode at the time t_5 . The slave node will as shown wait one receive slot, e.g. until the time t_6 before going into sleep mode. If the master node had not received the confirmation signal, it would have retransmitted the signal, and as the slave node is in receive mode in the respective time slot, it would have received the signal and would therefore not have been brought into sleep at the time t_6 , but would have switched to transmit mode in order to transmit a confirmation signal again. In this manner, i.e. when the slave node is controlled to wait at least one receive slot before going into sleep mode, it will normally be assured that both nodes are aware of the next polling time, before going into sleep mode.

It is obvious, though, that a maximum allowable number of time slots must be decided upon, e.g. corresponding to the above mentioned predetermined number of retransmittals.

In the above described cases at least one non-receipt of a signal has been involved, but it will be understood that if the signal from the master node in the first time slot after a sleep mode period is received by the slave node, and if the confirmation signal is received correctly by the master in the next time slot, then according to the invention the master will be brought into sleep mode e.g. at the time t_3 . The slave node may, as exemplified above, be brought into sleep mode immediately, after at least one further time slot, or at a point in time corresponding to a predetermined number of retransmittals. Other embodiments and details hereof will be possible, which will be obvious to a skilled person.

Even though precautions have been taken, as described above, to assure that both nodes involved in the above described time controlled poll mode method and system will receive information regarding the next polling time, unusual circumstances etc. may result in a lapse of synchronicity.

For example, the slave may not receive information regarding the next polling time, irrespective of the retransmittals, because the predetermined number of retransmittals has been exceeded before the message have been received (correctly). In this case it will be recognized by the control means both at the master and the slave node that
5 the synchronization has been lost, i.e. that a new polling time has not been arranged or agreed upon, since the master has no receive a confirmation from the slave and since the slave has not registered a message indicative of the next polling time.

In this case both nodes will change to another operational mode in order to establish
10 a communication, whereby synchronization may be regained. For example, both nodes may switch to a long preamble mode.

This has been exemplified in fig. 5, which illustrates the functionality of a master and slave node in such an embodiment. At the time t_1 both nodes are operative after a
15 sleep mode period and consecutive transmit and receive attempts are performed until the maximal predetermined number of slots have been reached at the time t_7 . Both the master and the slave, or rather the control means of these will have recognized the error-situation and will change the operating mode of both nodes to a long preamble mode. As shown, the master will transmit a signal having a long preamble,
20 followed by a payload frame at the time t_9 . The long preamble allows prospective slaves to enter a receive mode in respective time slots. Thus, it is supposed that the slave node in question initiates a receive mode at the time t_8 . It will detect the transmitted preamble from the master node, indicating that a communication is requested with the respective slave node, and the slave node will consequently
25 remain in receive mode until the payload, which comprises a message part indicative of the next polling time, has been received at the time t_{10} . In the time slot from t_{10} to the time t_{11} the slave node will transmit a confirmation signal to the master node, which has switched to a receive mode. If the master node receives the confirmation signal (correctly), it will be brought into sleep mode as indicated. The slave node
30 may as explained previously enter sleep mode immediately, after at least one further time slot, for example at the time t_{12} , or after a period corresponding to the

predetermined number of retransmittals. It will be understood that synchronization has now been re-established.

Another error-situation would occur if the slave node has received the next polling time, but the master node has not received a confirmation from the slave. This situation is illustrated in fig. 6. At the time t_1 both nodes are operative as described above after a sleep mode period and consecutive transmit and receive attempts are performed until the maximal predetermined number of slots have been reached at the time t_7 . Only the master, or rather the control means of the master node will have recognized the error-situation and will change the operating mode to a long preamble mode. As shown, the master will transmit a signal having a long preamble, followed by a payload frame at the time t_9 . The slave node will however operate according to the time controlled poll mode and will enter the sleep mode, for example immediately after the time t_7 as illustrated. At the next polling time the slave node will enter receive mode, where it according to the time controlled poll mode will stay for the predetermined number of time slots, e.g. until the time t_{13} , since it has not received a message dataframe from the master node. The slave node or rather the control means of this will now have recognized that synchronicity has been lost and will switch to a long preamble mode as indicated. In the illustrated example the slave will enter a receive mode at the time t_8 , it will detect the preamble transmitted from the master and will remain in receive mode until the payload has been received at the time t_{10} . The slave node will as explained above in connection with fig. 5 transmit a confirmation signal in a transmit mode from the time t_{10} to the time t_{11} , and if this is received by the master node, both nodes will enter sleep mode, the slave node possibly after a receive mode period (RX) as illustrated. It will be understood that the slave node may not necessarily enter communication with the master node during the first long preamble transmitted from the master node. In this case both nodes will remain in the long preamble mode until communication has been regained.

Further, it will be understood that the communication performed after the time t_{10} , e.g. after a communication has been established using the long preamble mode may include several time slots of consecutive transmit and receive slots as explained in

connection with figs. 2 – 4, depending on whether the respective signals are received correctly or not.

It will be understood that a master node may communicate with more than one slave node, and that the master node comprises means for avoiding possible time collision, e.g. by selecting different polling time values for the respective slave nodes. Further, the master node may be able to select polling time values randomly e.g. by selecting polling times between e.g. 250 sec and 350 sec, while maintaining a mean poll time value of e.g. 300 sec. In this manner the likelihood of collision will be avoided in a system comprising more than one master node.

Further, it will be understood that even if the invention has been described above using nodes capable of performing two-way communication, the invention may be utilized by systems comprising nodes only able to perform one-way communication. A few examples of this shall be explained in the following.

A transmitter in a one-way system may operate according to a long preamble mode, e.g. by sending a message frame comprising a long preamble of length of e.g. 500 msec. This will of course incur power consumption on the part of the transmitter that is higher than the power consumption in a corresponding two-way situation as described above. However, the message frame, e.g. the payload part of the frame will comprise data indicative of e.g. the next transmission time, thereby allowing the receiver to enter a sleep mode after having received the message. The receiver will as described above be controlled to be reactivated at or immediately before the transmission time indicated in the preceding message, thus allowing a substantial power saving to be achieved. Such a system will as a whole achieve a power saving that is greater than the power saving achieved by e.g. a similar system operation according to a long preamble mode.

If synchronicity should be lost in such a system, e.g. if the receiver does not receive the next message (correctly) and therefore has not received information concerning the next time of transmission, the receiver may enter operation according to a long

preamble mode, e.g. by being active for a short duration, e.g. 10 msec, during a long preamble period, e.g. 500 msec. The receiver remains in this mode until a message has been received from the transmitter comprising an indication of the next time of transmission. The receiver may now operate according to the time control poll mode again, e.g. enter sleep mode and be reactivated at the next time of transmission.

Alternatively, when synchronicity has been lost, both the transmitter and the receiver may operate according to normal operating mode, until synchronicity has been regained, e.g. until the receiver has received information regarding the next scheduled time of transmission. The slave node will have a higher power consumption than when operating according to long preamble mode, but the transmitter – the master – will have a lower power consumption than when operating according to a long preamble mode, since it will not have to transmit a fairly long preamble. Further, it may be expected that synchronicity may be regained fairly quickly in this manner, whereby the time controlled poll mode may be re-entered rather quickly again after a loss of synchronicity.

Other optional operational schemes are possible when using the time control poll mode according to the invention in a one-way-system, which will be obvious to a skilled person.

Patent Claims

1. Method of controlling operation of at least one transmitter and/or one receiver in a communication system, e.g. a system for transmission of control signals, request signals, interrogation signals etc. wherein a signal comprising a message frame transmitted from a transmitter to a receiver comprises a message part indicative of the time of transmission for a later signal.
5
2. Method according to claim 1, characterized in that said message part indicative of the time of transmission for a later signal, e.g. a later dataframe relates to the time of transmission for a following signal to be transmitted to said receiver.
10
3. Method according to claim 1 or 2, characterized in that said message part indicative of the time of transmission relates to a period of time following the signal in question.
15
4. Method according to claim 1 or 2, characterized in that said message part indicative of the time of transmission relates to a point of time relating to a timing reference, e.g. a timing reference established at each node or at least at one of the nodes involved.
20
5. Method according to one or more of claims 1 - 4, characterized in that said transmitter is brought into a special mode, e.g. a sleep mode, a power conserving mode, after having concluded transmission of said signal, preferably after receipt of a confirmation signal from said receiver.
25
6. Method according to claim 5, characterized in that said transmitter is controlled to be brought into normal operating mode at - or before - the time of transmission indicated by said message part.
30
7. Method according to one or more of claims 1 - 6, characterized in that said receiver is brought into a special mode, e.g. a sleep mode, a power

conserving mode, after having received said signal, preferably after having transmitted a confirmation signal and possibly after a further retransmission time.

8. Method according to claim 7, characterized in that said receiver is
5 controlled to be brought into normal operating mode at - or before - the time of transmission indicated by said message part.

9. Method according to one or more of claims 1 - 8, characterized in
that said method comprises steps of resuming synchronization, e.g. in case said
10 receiver has not received said time indicative message part or in case said transmitter has not received confirmation from said receiver of receipt of said time indicative message part.

10. Method according to claim 9, characterized in that said steps of
15 resuming synchronization comprises the step of altering the operating mode of the transmitter until a communication has been established with the receiver, where after normal operating mode may be resumed.

11. Method according to claim 9 or 10, characterized in that said steps
-20- of resuming synchronization comprises the step of altering the operating mode of the receiver until a communication has been established with the transmitter, where after normal operating mode may be resumed.

12. Method according to one or more of claims 1 - 11, characterized in
25 that said special mode of said transmitter and/or said receiver comprises a sleep mode, e.g. a low power consumption mode of a radio frequency operating part, e.g. a radio frequency transmitter or a receiver, respectively.

13. Method according to one or more of claims 1 - 12, characterized in
30 that said at least one transmitter and/or at least one receiver each may form part of a node comprising a transceiver arrangement.

14. Method according to one or more of claims 1 - 13, characterized in that said communication system comprises at least two nodes, each comprising at least a transmitter and/or a receiver for wireless transmission, e.g. radio frequency transmission.

5

15. Communication system comprising at least one transmitter and one receiver, e.g. a system for transmission of control signals, request signals, interrogation signals etc. wherein said at least one transmitter is designed to be able to include a message part indicative of the time of transmission for a later signal when transmitting a signal to
10 said at least one receiver.

16. Communication system according to claim 15, characterized in that said at least one transmitter and/or one receiver comprise timing means.

15 17. Communication system according to claim 15 or 16, characterized in that said at least one receiver comprises control means for switching between at least two modes of operation in dependence on a received message part indicative of the time of transmission for a later signal.

20 18. Communication system according to claim 15, 16 or 17, characterized in that said at least one transmitter comprises control means for switching between at least two modes of operation in dependence on a transmitted message part indicative of the time of transmission for a later signal.

25 19. Communication system according to claim 17 or 18, characterized in that said at least two modes of operation comprise a normal operating mode and a sleep mode, e.g. a power conserving mode.

30 20. Communication system according to claim 19, characterized in that that said sleep mode, e.g. a power conserving mode of said transmitter and/or said receiver comprises sleep mode, e.g. a low power consumption mode of a radio

frequency operating part, e.g. a radio frequency transmitter or a receiver, respectively.

21. Communication system according to one or more of claims 15 - 20,
5 characterized in that said at least one transmitter and/or said at least one receiver comprises battery power supply means.

22. Communication system according to one or more of claims 15 - 21,
characterized in that said at least one transmitter and/or said at least one
10 receiver comprises means, e.g. control means for determining a lack of synchronicity and means for initiating a synchronization resumption process.

23. Communication system according to one or more of claims 15 - 22,
characterized in that said system is designed to operate in accordance
15 with a method according to one or more of claims 1 - 14.

24. Use of method according to one or more of claims 1 - 14 and/or system
according to one or more of claims 15 - 23 for updating of measures values in e.g.
control, request and/or interrogation systems.

Abstract:

Method of and communication system for controlling operation of at least one transmitter and/or one receiver in a communication system, e.g. a system for
5 transmission of control signals, request signals, interrogation signals etc. wherein a signal comprising a message frame transmitted from a transmitter to a receiver comprises a message part indicative of the time of transmission for a later signal.

1/4

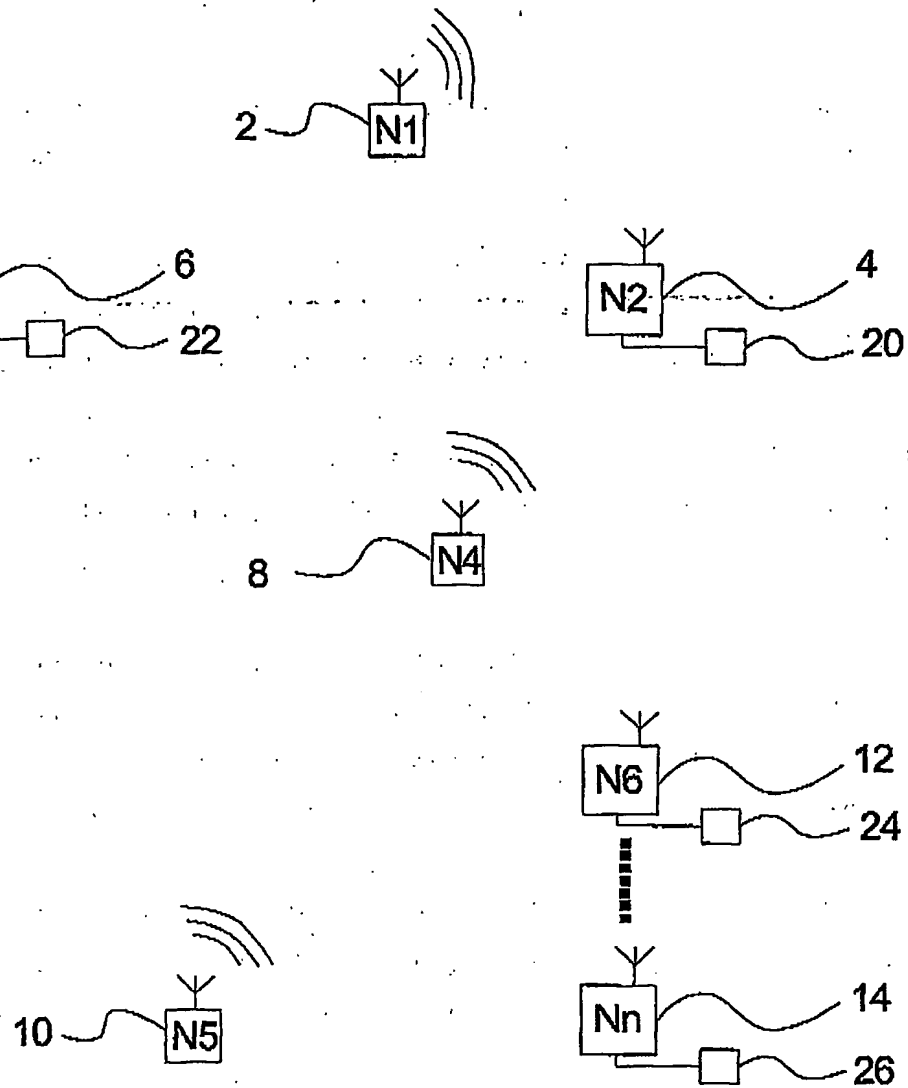


Fig. 1

2/4

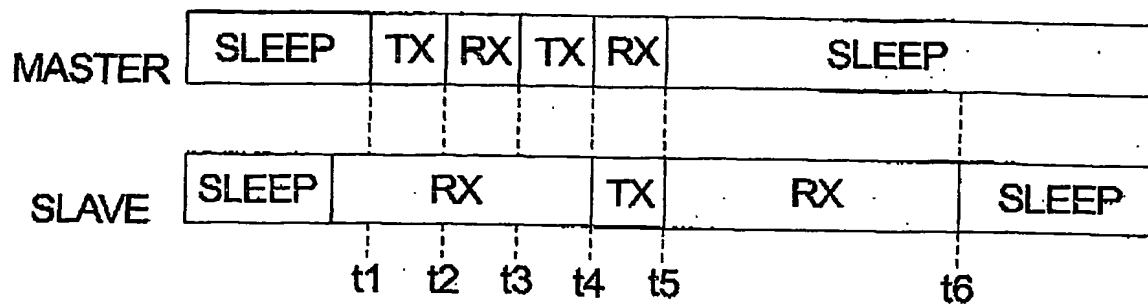


Fig. 2

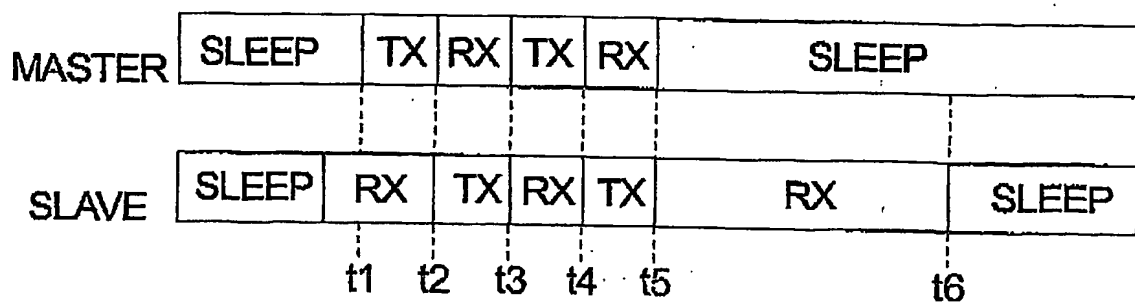
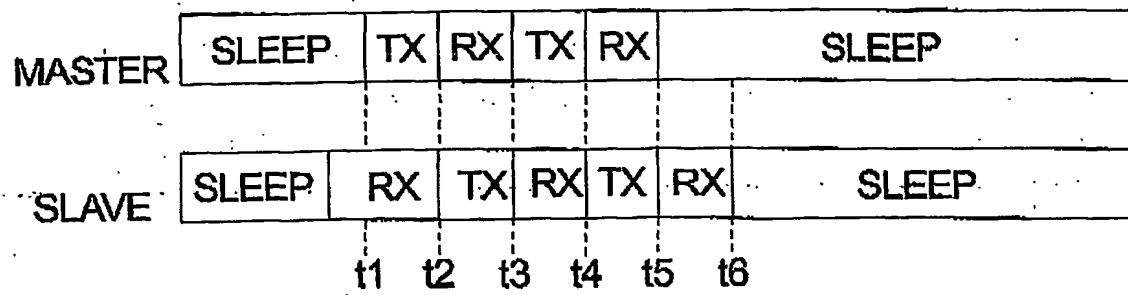


Fig. 3

3/4

*Fig. 4*

4/4

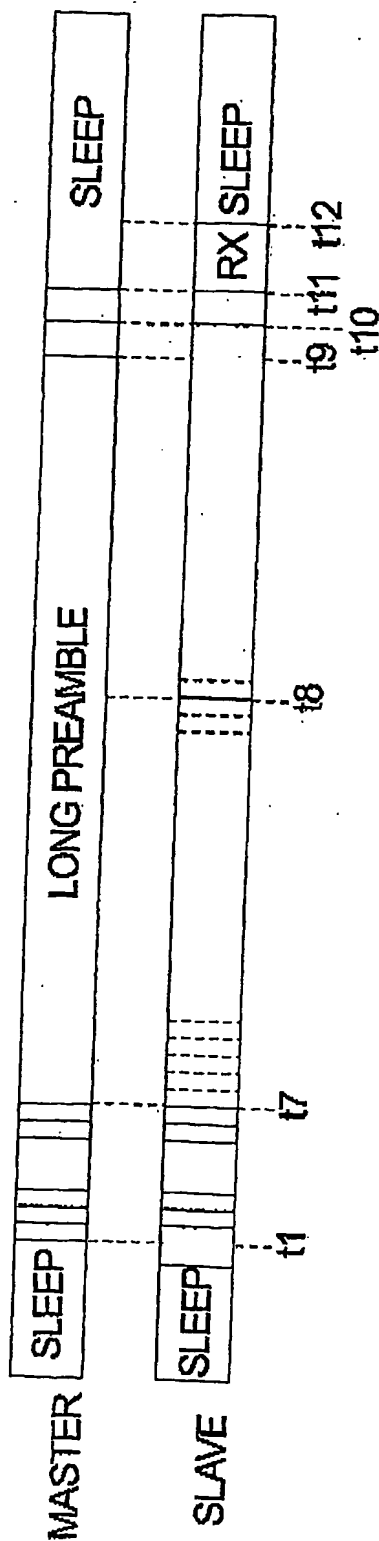


Fig. 5

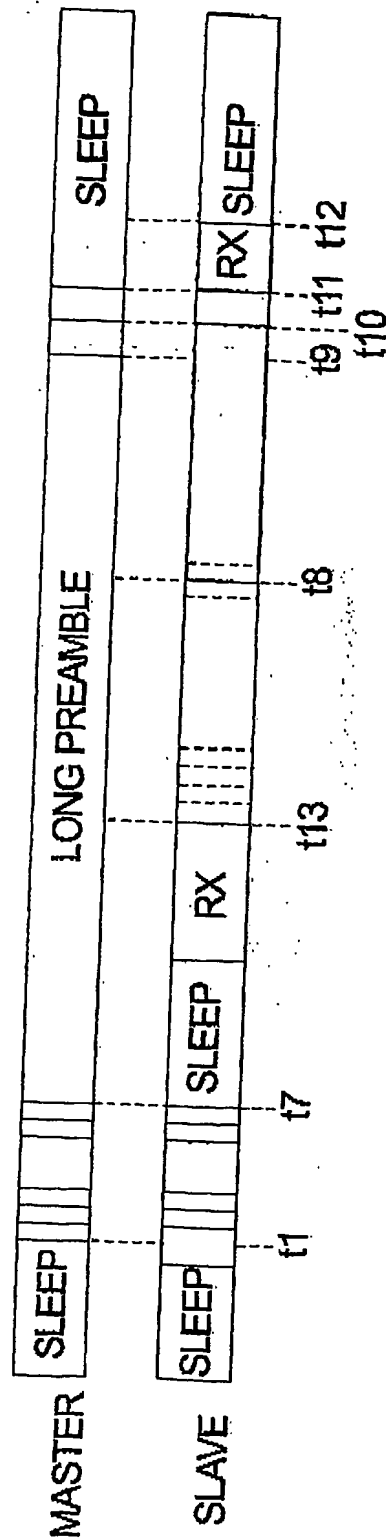


Fig. 6

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.